


Central Article Code: C42010D01-A
 Local Code: 12N9-4B-1

Created: 02/09/2005
 Modified: 15/12/2020

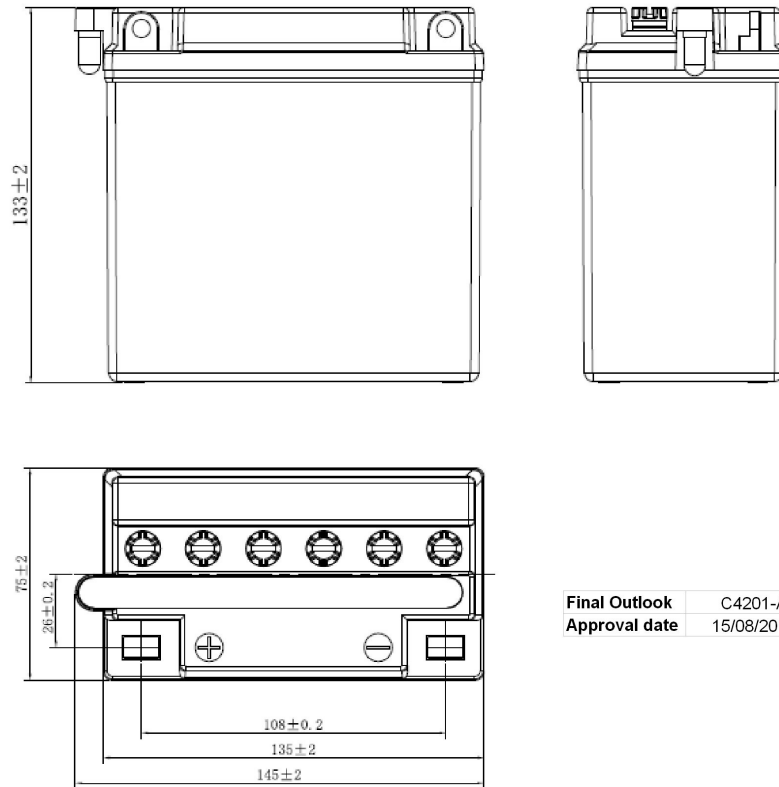

Final Outlook	C4201-A
Approval date	15/08/2010

PERFORMANCES		CONTAINER	
Voltage (V):	12 V	Type:	C42 WHITE
C20 (Ah):	8.0 10 h	Hold Down:	B0
Cranking (A):	85 EN	H.D. Adapter:	No
Charge:	DRY	COVER	
Technology:	Vented/Flooded	Type:	Motorbike (A ventilati BLACK
Grid:	Low Sb	Polarity:	ETN 1
Vibration:	Not Defined	Terminals:	M06
Endurance:	Not Defined	Terminal Adapter:	No
		SOCI:	No
		Ventilation:	Moto-A
		Filter:	No
		Lateral Plug:	No
STD. DIMENSIONS		PLUGS	
Length (mm ± 2):	135	Type:	6 x Moto Plug RED
Width (mm ± 2):	75	HANDLES	
Height (mm ± 2):	135	Type:	None
Total Weight (kg ± 5%):	2.90	OTHERS	
This is a dry battery supplied with bottles of sulphuric acid. Sale of acid to end users is forbidden by Eu.Reg.1148/2019. Dry batteries must be filled with acid before delivery to end users All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.		Degassing Tube:	No
		EAC certified	