


CUSTOMER DATASHEET


Printed: 08/11/2023

Product Management Transportation Europe

D03086C10-A Created: 17/11/2022 Central Article Code:

Modified: 30/11/2022 Local Code: EF1250

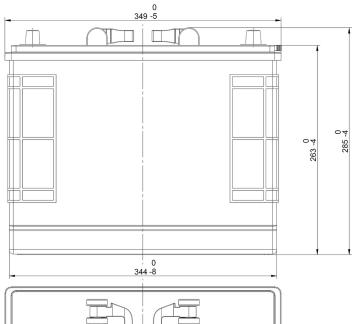



Final Outlook D0310-A Approval date 01/05/2014

PERFORMANCES

Voltage (V): 12 V

C20 (Ah): 125.0 20 h 850 ΕN Cranking (A):

WET Charge:

Vented/Flooded Technology:

Grid: Ca/Ca

Vibration: V2+ (30Hz+/-2Hz/6g/10h)

Endurance: E2+ (110 cycles@50%)

D03

B0 Hold Down: H.D. Adapter: No

Type:

COVER

CONTAINER

GREY MEDIUM

GREY MEDIUM Type: Flat/Press

Polarity: ETN 0

Terminals: EN taper post

Terminal Adapter: No SOCI: No Ventilation: Central

Filter: 1 Filter at Right

Lateral Plug:

STD. DIMENSIONS

Length (mm ± 2): 349 Width $(mm \pm 2)$: 175 Height (mm ± 2): 285 Total Weight (kg ± 5%): 31.00

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

PLUGS

1 x VCL Vent **GREY MEDIUM** Type:

HANDLES

2 x Rigid **BLACK** Type:

OTHERS

Degassing Tube: No