


CUSTOMER DATASHEET


Printed: 09/11/2023


Product Management
Transportation Europe

Central Article Code: DB9100W01-A Created: 06/09/2005

Local Code: EG1353 Modified: 04/03/2014

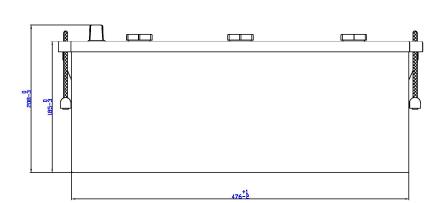



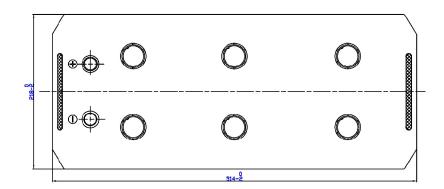

Final Outlook DB901-A Approval date 01/10/2005

PERFORMANCES

Voltage (V): 12 V C20 (Ah): 135.0

135.0 20 h 1000 EN

Charge: WET

Cranking (A):

Technology: Vented/Flooded

Grid: Hybrid

Vibration: V2 (30Hz+/-2Hz/6g/2h)

Endurance: E2 (90 cycles@50%)

CONTAINER

Type: DB9 BLACK Hold Down: B0

H.D. Adapter: No

COVER

Type: Flat/Screw BLACK

Polarity: ETN 3

Terminals: EN taper post

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

STD. DIMENSIONS

39.80

Length (mm ± 2): 514
Width (mm ± 2): 218
Height (mm ± 2): 210

Total Weight (kg ± 5%):

Type: 6 x M27

BLACK

HANDLES

PLUGS

Type: 2 x Rope (Rigid holder) BLACK

OTHERS

Degassing Tube: No

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

This document includes confidential data, is not contractual and could be changed without notice. Any use, copy or distribution has to be authorised in writing by EXIDE Technologies.