


CUSTOMER DATASHEET


Printed: 09/11/2023


Product Management Transportation Europe

D05100C01-A Created: 28/06/2011 Central Article Code:

31/07/2020 EN1100 Modified: Local Code:

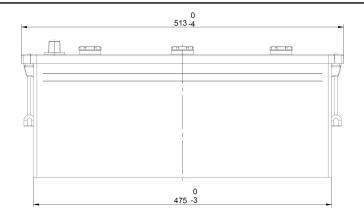



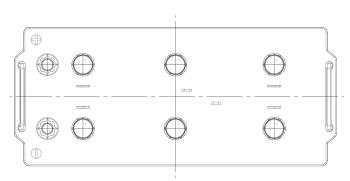

Final Outlook D0501-A Approval date 01/05/2015

| PERFORMANCES | | CONTAINER | | |
|--|--------------------------------|--------------------------------|--------------------|-------|
| Voltage (V): C20 (Ah): Cranking (A): | 12 V 180.0 20 h 1000 EN | Type: Hold Down: H.D. Adapter: | D05 B0 No | BLACK |
| Charge: Technology: | WET Vented/Flooded | COVER Type: Flat/Screw BLACK | | |
| Grid: Vibration: | Ca/Ca V2 (30Hz+/-2Hz/6g/2h) | Polarity: Terminals: | ETN 3 EN taper pos | |
| Endurance: | E2 (90 cycles@50%) | Terminal Adapter: SOCI: | No No | |
| STD. DIMENSIONS | | Ventilation: Filter: | Independent No | |

STD. DIMENSIONS

Length (mm ± 2): 513 Width $(mm \pm 2)$: 223 Height (mm ± 2): 223 Total Weight (kg ± 5%): 42.80

> 2 x Rope (Rigid holder) BLACK Type: **OTHERS**

No

PLUGS

HANDLES

BLACK

Degassing Tube: No

6 x M27

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

Used for BOSCH

Lateral Plug:

Type: