


CUSTOMER DATASHEET


Printed: 09/11/2023

Product Management
Transportation Europe

Central Article Code: D02072C03-A Created: 30/10/2018

Local Code: EN850 Modified: 31/07/2020

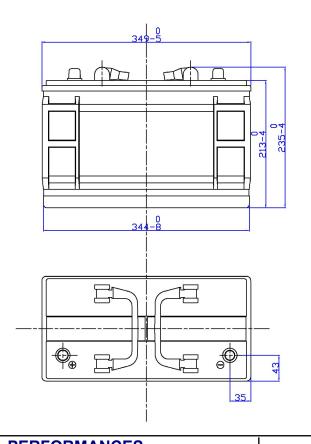



Final Outlook D0203-A Approval date 01/10/2005

PERF	JKMA	NCES
------	------	------

Voltage (V): 12 V

C20 (Ah): 110.0 20 h Cranking (A): 720 EN

Charge: WET

Technology: Vented/Flooded

Grid: Ca/Ca

Vibration: V2 (30Hz+/-2Hz/6g/2h)

Endurance: E2 (90 cycles@50%)

CONTAINER

Type: D02 BLACK Hold Down: B0

H.D. Adapter: No

COVER

Type: Flat/Press BLACK

Polarity: ETN 1

Terminals: EN taper post

Terminal Adapter: No SOCI: No

Ventilation: Independent

Filter: No Lateral Plug: No

STD. DIMENSIONS

 Length (mm \pm 2):
 349

 Width (mm \pm 2):
 175

 Height (mm \pm 2):
 235

 Total Weight (kg \pm 5%):
 25.40

20.10 Local 1.00 Local

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

PLUGS

Type: 2 x Vent BLACK

HANDLES

Type: 2 x Rigid BLACK

OTHERS

Degassing Tube: No

Used for BOSCH