


Central Article Code: D02076W16-A
 Local Code: ER550

Created: 06/03/2009
 Modified: 31/07/2020

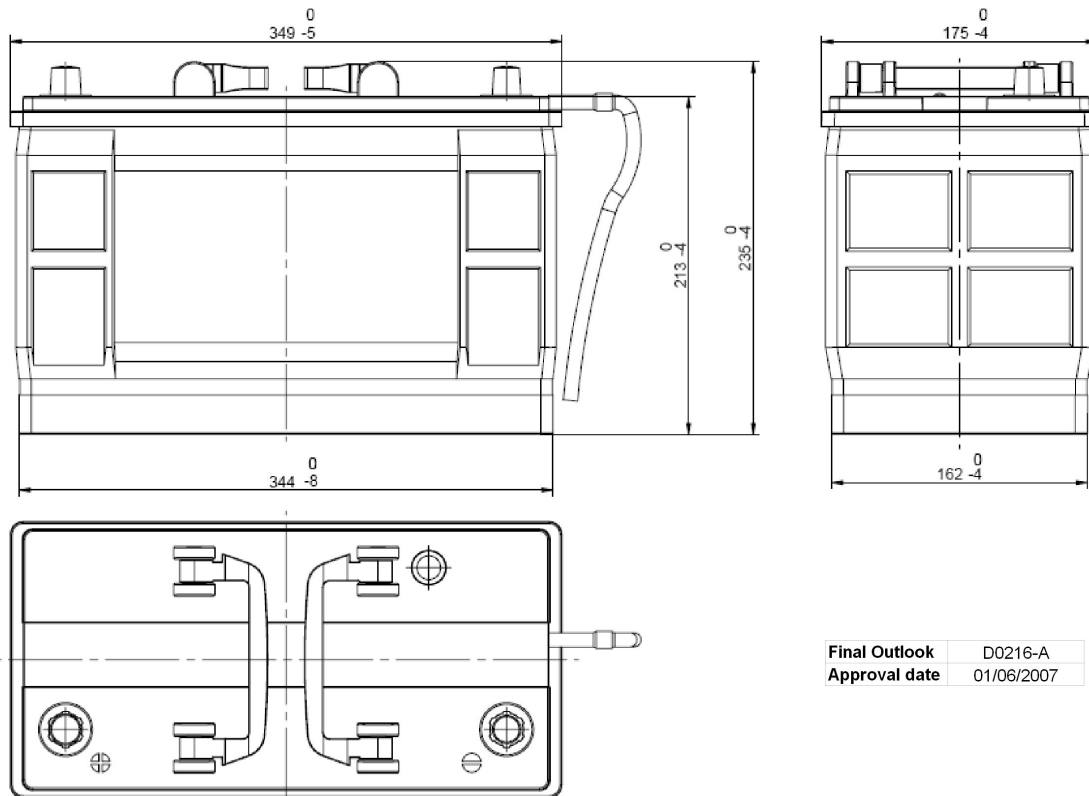

Final Outlook	D0216-A
Approval date	01/06/2007

PERFORMANCES

Voltage (V):	12 V	
C20 (Ah):	115.0	20 h
Cranking (A):	760	EN
Charge:	WET	
Technology:	Vented/Flooded	
Grid:	Hybrid	
Vibration:	V2 (30Hz+/-2Hz/6g/2h)	
Endurance:	300 cycles@40%	

STD. DIMENSIONS

Length (mm ± 2):	349
Width (mm ± 2):	175
Height (mm ± 2):	235
Total Weight (kg ± 5%):	27.80

All figures show nominal values. Tolerances are according to EN50342 and applicable European Regulations.

CONTAINER

Type:	D02	BLACK
Hold Down:	B0	
H.D. Adapter:	No	

COVER

Type:	Flat/Press	BLUE LIGHT
Polarity:	ETN 1	
Terminals:	EN taper post	
Terminal Adapter:	No	
SOCI:	Black SOCI with one ball	
Ventilation:	Central	
Filter:	1 Filter at Right	
Lateral Plug:	No	

PLUGS

Type:	1 x VCL Vent	BLUE LIGHT
-------	--------------	------------

HANDLES

Type:	2 x Rigid	BLACK
-------	-----------	-------

OTHERS

Degassing Tube:	Tube+Valve
-----------------	------------

Tested acc. BCIS-08 Rev. Dec02